YP-R0

MP4 播放器
用户手册

無窮想象 無限可能

感謝您購買三星產品。
要獲得更爲全面的服務，請到以下網站
注册您的產品：

www.samsung.com/register

SAMSUNG

使用此用户手册

- 根據不同的韌體安裝，用户手册中某些内容可能會與 MP4 播放器不同。有些内容可能會有改變，恕不預先通知。
- 您的 MP4 播放器及螢幕可能與用户手册上的説明不同。
- 請參閱第 3 頁的“MP4 播放特性”查看 MP4 中的一些特性。
- 請參閱第 48 頁的“疑難解答”查看解除疑難的方法。

用户手册中的圖標使用

圖標	描述
参考	参考，使用提示，或者新增資訊
注意	安全警告及預防
< >	螢幕中的功能表名稱或文本; 例如： <是>
[ ]	按鍵；例如： [⮌] (表示返回鍵)

安全資訊

此用户手册描述怎樣恰當使用您的 MP4 播放器。爲了避免可能造成對機器及自身的損害，請仔細閱讀。請特別注意以下的安全警告注意事項：

保護您自己

注意
- 請勿自行拆卸，修理或改裝播放器。

注意
- 請勿使播放器受潮或進水。 如果播放器浸水，請不要開機以免您受到電擊。
- 雷雨天氣時，請勿使用播放器。否則，容易造成播放器故障或受到電擊。

注意
- 當您在開車或騎自選車，汽車或摩托車時請勿使用耳機。
  否則，可能導致嚴重的交通事故。而且有些地區的法律禁止這些行爲。
  在路上（ 尤其是在人行道上）使用耳機有可能導致嚴重的事故。
- 爲了安全起見，進行運動或散步時請確保耳機連接線不會挂到手臂或其他周圍物體上。

警告
- 爲了避免火災或者電擊，請勿將播放器放在潮濕，灰塵多，或者受污染的環境中。

警告
- 請勿使用已破裂或壞掉螢幕的產品。壞掉的玻璃或丙烯酸可能會傷害您的手或臉。請到三星服務中心更換螢幕。粗心操作導致的損壞將不能保證。

警告
- 請勿將耳機音量開的過大。醫生警告，請勿長期暴露於高音量中。MP3 聲音最大輸出功率：20mW。

保護您自己

警告

- 過長時間使用耳機或頭戴式耳機有可能導致聽力嚴重受損。
  若長時間聽音樂的聲音超過 85 分貝，聽力將會受到不良影響。聲音越大，聽力受損程度越嚴重(日常對話的聲音爲 50 至 60 分貝，而在喧嘩的路上的噪音强度約爲 80 分貝)。
  强烈建議使用者將音量調至中等(中等音量通常在最高音量的 2/3 以下)。
- 如果出現耳鳴現象, 請調低音量或停止使用耳機或頭戴式耳機。

警告

- 電池不能長期處於過熱狀態，例如太陽，火等類似物體

保護您的 *MP4* 播放器

警告

- 請勿將播放器置於温度高於 95°F (35°C)的環境中, 例如蒸氣房或停下來的汽車車廂内。
- 請勿重擊播放器。
- 請勿將重物置於播放器頂部。
- 避免任何异物或灰塵進入播放器。
- 請勿將播放器置於磁性物體附近。

注意

- 請務必備份重要的資料。請注意，三星公司對數據丢失不承擔任何責任。
- 請使用由三星公司提供的或由三星公司認可的附件。

注意

- 切勿弄濕本播放器，切勿使用苯或稀釋劑等化學物清洗播放器。否則有可能導致火災，電擊或使播放器受損。

- 如果不按此項説明操作，可能會對播放器造成物理損傷或損壞。

- 當打印本使用用户手册時，我們建議您使用彩色打印機并選擇合適的紙張打印，以便獲得最佳的閱讀資訊。

MP4 播放器特性

可以聆聽三星 Digital Natural Sound engine (DNSe™)仿真三維環繞的立體聲音

在不同的格式及播放高質視訊中下載視訊。

用圖片播放幻燈片及使用作爲數字畫面的播放器。

使用文本閱讀器打開文本然後瀏覽文本檔案。

聆聽您喜愛的廣播電臺。

使用記憶體卡擴展播放器的容量然後儲存更多的內容。

YP-R0

目錄

6 使用基本功能

7 檢查附件
8 您的 MP4 播放器
10 連接電腦及電池充電
12 開機及鎖定按鍵
13 從主功能表螢幕進入功能表
14 輸入文本

15 管理媒體檔案

16 下載媒體檔案
16 支援檔案格式及電腦配置
17 使用 EmoDio 下載檔案
18 使用作爲卸除式磁碟的播放器下載檔案
19 斷開播放器與電腦的連接
20 管理檔案

21 播放視訊及音樂

22 視訊
22 播放視訊檔案
24 使用視訊選項
25 音樂
25 聆聽音樂
28 創建播放清單
29 使用音樂選項

目錄

30 使用附加應用程序
31 圖片
31 瀏覽圖片
32 播放幻燈片
32 設定墻紙圖片
33 文本
33 瀏覽文本檔案
34 插入書籤
34 更改背景樣式
35 FM 廣播
35 聆聽 FM 廣播
36 保存廣播電臺
37 使用 FM 廣播選項
38 DATACASTS
39 MICRO SD
39 插入記憶體卡 (選項)
40 在記憶體卡中管理檔案

41 自定義設定
42 設定
43 聲音設定
43 顯示幕設定
43 語言設定
44 日期和時間設定
44 系統設定

46 附錄
47 播放器的維護
48 疑難解答
50 產品規格
52 許可證

使用基本功能

學習播放器的基本操作。

檢查附件 7
您的 MP4 播放器 8
連接電腦及電池充電 10
開機及鎖定按鍵 12
從主功能表螢幕進入功能表 13
輸入文本 14

檢查 附件

您的產品盒子內包含以下附件:



MP4 播放器



耳機



USB 連接線

參考

- 用户手册中的附件圖面僅爲示例，可能與實物存在差异，請以實物爲准。
- 您能够從當地的三星經銷商中獲得附加的配件。

您的 MP4 播放器

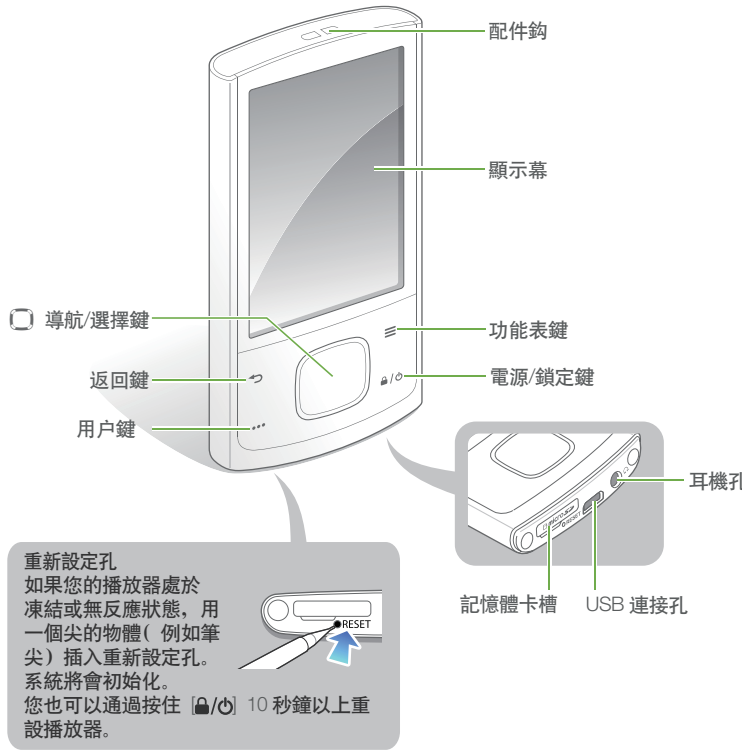
配件鈎
顯示幕
導航/選擇鍵
功能表鍵
返回鍵
電源/鎖定鍵
用户鍵
耳機孔
記憶體卡槽
USB 連接孔
重新設定孔
如果您的播放器處於凍結或無反應狀態，用一個尖的物體（ 例如筆尖）插入重新設定孔。系統將會初始化。
您也可以通過按住 [🔒/⏻] 10 秒鐘以上重設播放器。
RESET

按鍵功能

按鍵		功能	
	返回	• 返回上一級螢幕 • 返回主功能表螢幕 (按住)	
	功能表	在當前功能表打開可用選項清單	
	用户	• 視訊播放期間重繞 10 秒 • 音樂播放期間重複曲目部分 • 放大圖片螢幕 • 顯示文本的螢幕時更改字體大小	
	電源/鎖定	• 開機及關機 (按住) • 鎖定按鍵	
	導航/選擇		在螢幕上，下，左，右滾動
		(中心區)	• 選擇突出功能表或選項 • 開始或暫停播放
		(上/下)	調整音量
		(左/右)	• 跳至上一/下一個檔案 • 移至上一/下一頁 • 向後/向前搜尋 (按住)

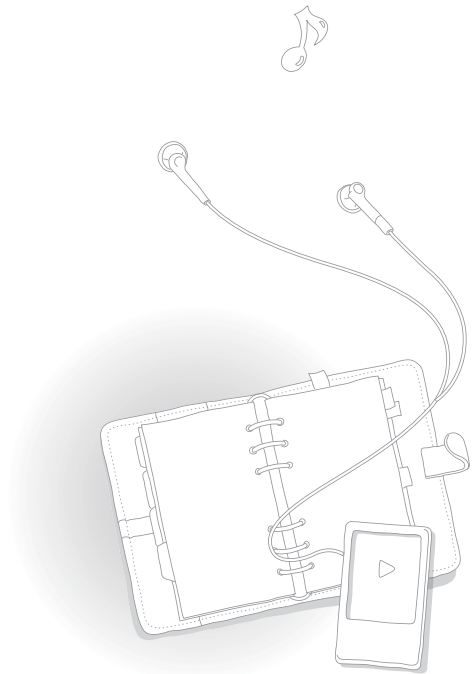

連接電腦及電池充電

第一次使用或很長時間没有使用本播放器，請先充電。

注意

本播放器使用的内置鋰電池不可使隨意拆換電池。關於此電池的更換，請聯系您的供應商。

1. 將 USB 連接線的小頭末端連接至播放器底部的 USB 連接孔。
2. 將 USB 連接線的另一端連接到電腦的 USB 插孔上。

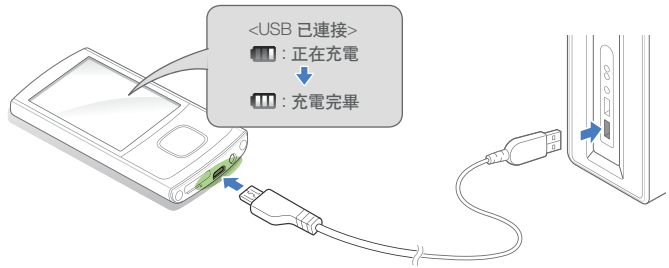

充電時間	大約 3 小時

3. 當充電完畢，請從播放器與電腦中拔掉 USB 連接線。

電池注意事項

- 請在 5˚C~35˚C (41˚F~95˚F) 的温度範圍內進行充電及儲存。
- 電池充電時間不要超過 12 小時。過量充電或充電不足都會縮短電池的使用壽命。
- 根據使用播放器的方法不同，實際電池壽命可能不同或者比説明的壽命短。

參考

- 電腦的性能不同，充電時間可能不同。
- 如果您將播放器連接到便携式電腦上充電時，請確保便携式電腦是處於充滿電的狀態或已經與外部電源連接。
- 播放器可能只能使用 USB 連接線連接到電腦充電。由於播放器可能不能充電或正確操作，請勿使用單獨的 USB AC 充電器充電。

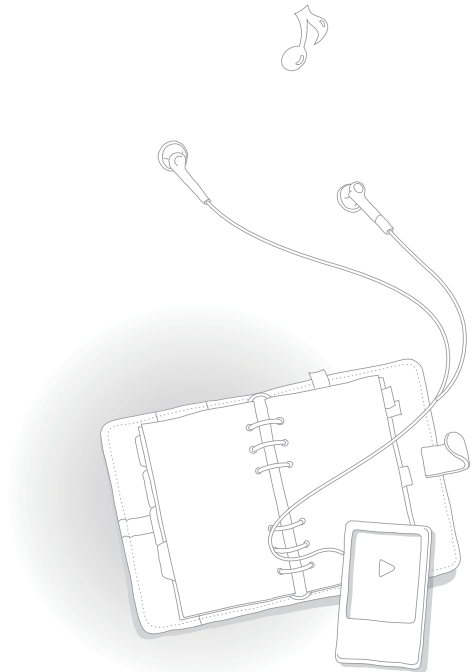

開機及鎖定按鍵

開機或關機

按住 [🔒/⏻] 開機或關機。



參考

如果在 5 分鐘內没有使用播放器，播放器將會自動關閉。

鎖定或解除鎖定按鍵

在聆聽音樂或播放視頻時爲了有不需要的按鍵操作請鎖定按鍵。
按 [🔒/⏻] 鎖定或解除鎖定按鍵。

參考

當按鍵已鎖定時，螢幕頂部將會出現 🔒 。

從主功能表螢幕進入功能表

學習從主功能表螢幕上選擇功能表。

當開機時，主功能表螢幕將會出現然後可以從主功能表螢幕上進入功能表或功能。



▲ 主功能表螢幕

1. 在主功能表中，使用 [◯] 滾動需要的功能表然後按 [●]。
2. 按 [◯] 滾動一個項目然後按 [●]。
3. 使用您選擇的功能表。
4. 按 [↩] 返回上一級螢幕。
   - 按住 [↩] 返回主功能表螢幕。

輸入文本

使用虛擬鍵盤輸入文本。

重新命名播放清單，例如:

1. 選擇音樂播放清單，然後按 [☰] 及選擇 <重命名>。
   請參閱第 28 頁。
2. 選擇按鍵輸入需要的字符。
   - 選擇 DEL，刪除字符。
   - 按 [☰]，更改文本輸入模式。

3. 當已完成，選擇 <OK>。

管理媒體檔案

下載媒體檔案到播放器，然後搜尋或刪除儲存在播放器的檔案。

下載媒體檔案 16
管理檔案 20

下載媒體檔案

從電腦中下載媒體檔案到播放器。

注意

爲了避免損害播放器及破壞檔案，請不要在檔案正在傳送中斷開USB 連接線。

支援的檔案格式及電腦配置

所支援的檔案格式

功能表	檔案格式
視訊	視訊檔案
音樂	音樂檔案
圖片	圖象及圖片檔案
文本	文本檔案

參考

所支持的文件格式，請參考第50頁“產品規格”。

被推薦的電腦配置

CPU	奔騰 500 MHz 或更高
操作系統	Windows XP/Vista
其他	• 分辨率 1024 X 768 或更高 • Microsoft DirectX 9.0 或更高 • Internet Explorer 6.0 或更高

使用 EmoDio 下載檔案

您能夠容易使用 EmoDio 下載不同的媒體檔案。

參考

- 關於電腦安裝 EmoDio 的資訊，請參考所提供的快速指南。
- EmoDio 爲了提高性能將會經常的升級。EmoDio 可能會改變，恕不預先通知。

1. 使用 USB 連接線連接播放器到電腦。
   - 請參閱第 10 頁連接播放器到電腦。
   - 當播放器已連接電腦，EmoDio 會在電腦裏自動啓動。
2. 在 EmoDio 主螢幕中點擊 <我的電腦> 。
3. 在電腦螢幕底部點擊 <新增檔案夾> 或 <新增檔案> 。
4. 選擇您想要的檔案夾或檔案。
5. 在電腦螢幕上選擇您想要的檔案然後點擊 。
   - 此選擇的檔案已拷貝到播放器上。

參考

- 當連接電腦時，不能使用播放器。
- 如果播放器處於低電量狀態，播放器將會先充電幾分鐘然後再與電腦連接。
- 如果播放器是通過 USB hub 與電腦連接，電腦可能會不能識別播放器。請將播放器與電腦直接相連。
- 請使用 FAT32 系統在電腦上格式化您的播放器。在 Windows Vista, 點擊 <還原裝置的默認值> 然後格式化您的播放器。
- 音樂識別技術及相關數據由 Gracenote® and Gracenote CDDB® 音樂識別服務SM 提供。
- CDDB 是 Gracenote 公司所注册商標。 Gracenote 標識及標徽， Gracenote CDDB 標識及標徽，及 “Powered by Gracenote CDDB” 標識是 Gracenote 公司的注册商標。Music Recognition Service 與 MRS 是 Gracenote 公司的服務標志。

使用作爲卸除式磁碟的播放器下載檔案

1. 使用 USB 連接線將播放器到電腦連接。
2. 在電腦上，打開 <我的電腦> 然後 <R0> 檔案夾。
3. 選擇您想要的檔案夾。
4. 拷貝電腦的檔案到播放器。

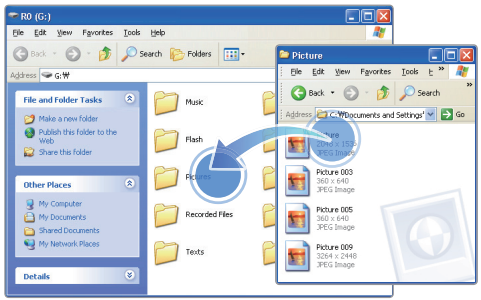

參考

- 電腦上的檔案順序將會與播放器上的檔案順序不同。
- 您的播放器通過 DRM (數字版權管理) 系統檔案保護來限制播放。

什么是 DRM?

數字版權管理 (DRM) 是爲了防止非法使用數字內容與保護版權所有利益與權利的技術與服務

斷開播放器與電腦的連接

爲了避免在斷開播放器與電腦的連接時而造成數據丟失或損壞播放器，請認真遵守下面步驟:

1. 在 Windows 任務欄中點擊 。

2. 點擊彈出的資訊。

3. 從播放器與電腦中拔掉 USB 連接線。

注意

- 爲了避免損害播放器及破壞檔案，在檔案傳送過程中請不要斷開 USB 連接線的連接。
- 當電腦正在播放播放器的檔案時，請不要在斷開播放器的連接。確保停止播放後再斷開播放器與電腦的連接。

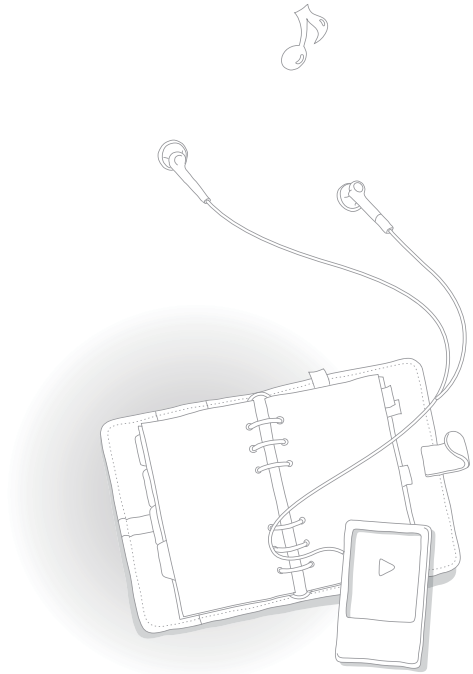

管理檔案

在檔案夾中搜尋檔案然後從播放器中刪除檔案。

搜尋檔案

1. 在主功能表中，選擇 。
2. 從清單中選擇檔案夾。



3. 通過檔案清單滾動。
4. 選擇需要的檔案。

刪除檔案

1. 從清單中選擇檔案夾。
2. 選擇需要的檔案刪除然後按 [☰]。
3. 選擇 <刪除> 。
4. 從彈出窗口選擇 <是> 。

播放視訊及音樂

使用 EmoDio 或卸除式磁碟傳送音樂及視訊到播放器，然後播放高質量的視訊及聆聽最佳 3D 環繞聲的音樂。

視訊.....22

音樂.....25

視訊

在播放器上播放視訊檔案。
參閱第 16 頁的"下載媒體檔案"下載檔案。

播放視訊檔案

1. 在主功能表上，選擇 。
2. 從清單中選擇視訊檔案。
   - 螢幕可以變爲風景模式。
3. 使用以下按鍵控制播放。請參閱 "視訊播放螢幕。"

說明	操作步驟
跳至上一個檔案或下一個檔案	按 [◯/◯] • 如果您在檔案播放 3 秒後按 [◯]，此播放將會重新開始。
在檔案中向後或向前搜尋	按住 [◯/◯]
重繞 10 秒	按 [•••]
暫停或恢複播放	按 [◉]

(當在風景模式)

參考

- 使用 EmoDio 下載不支援格式的檔案到播放器，EmoDio 將會自動轉換檔案格式，以至您的播放器能够播放。
- 您的播放器能够播放視訊檔案的字幕檔案 (.smi) 。字幕檔案必須與視訊檔案保存在相同的檔案夾中播放及檔案名稱必須與視訊檔案相同。

視訊播放螢幕

No.	描述
1	檔案名稱
2	播放情況
3	過去的播放時間 / 總的播放時間
4	播放進度條

從章節中播放視訊

在視訊播放期間按住 [◉] 。您的播放器將會把視訊檔案分爲15 個章節然後從每一章節中捕獲靜態圖象。當您選擇其中一張靜態圖象，視訊將會從此點開始播放。



選擇返回上一級螢幕

使用視訊選項

1. 在視訊播放期間，按 [☰]。
2. 選擇需要的選項。

選項	描述
亮度	調節螢幕亮度。
DNSe	選擇視訊合適的音效。
馬賽克搜尋	將視訊檔案分爲 15 個章節。您能够選擇其中一個章節然後從此章節開始播放。

參考

- RMVB格式的視頻檔案播放時，DNse功能無法使用。

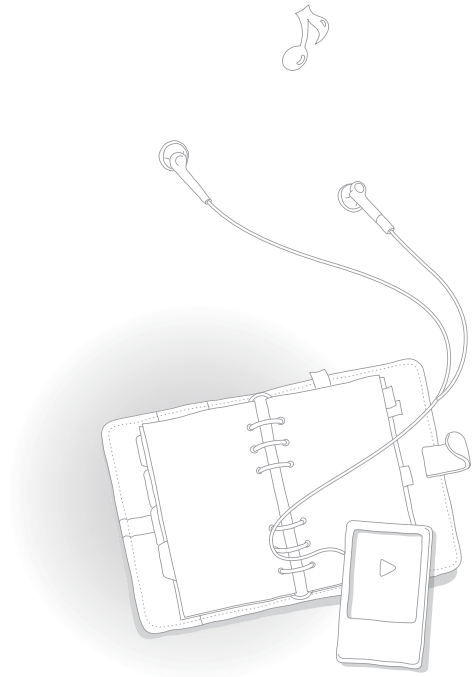

音樂

播放播放器的音樂檔案。
請參閱第 16 頁"下載媒體檔案 "下載檔案。

參考

如果您想更新檔案庫，您的播放器將會清除顯示在 <最近新增> 及 <播放最多目録>的檔案清單。

聆聽音樂

音樂檔案通過類型在檔案夾裏分類。您能够更容易找到需要的音樂檔案。

音樂種類	功能
歌手	按歌手顯示檔案。
專輯	按專輯顯示檔案。
歌曲	按檔案名顯示檔案。 (特殊字符，數字及字母的順序)
派別	按派別顯示檔案。
播放清單	按已創建播放清單顯示。
最近新增	按最近下載的檔案顯示。
播放最多目録	按經常播放最多的檔案顯示。
音樂瀏覽器	顯示所有在音樂檔案夾裏的所有檔案。
未知	没有顯示曲目資訊的檔案。 (ID3 標籤)。

什么是 ID3 標籤?

ID3 標籤是 MP3 所附帶的相關資訊。它包括音樂資訊，例如標題，歌手，專輯，或曲目數目，在播放期間能够顯示音樂演奏的螢幕。

播放音樂檔案

1. 在主功能表中，選擇 。
2. 選擇音樂種類。
   - 播放最後播放的檔案，選擇 <現在播放>。
3. 選擇檔案播放。
4. 使用按鍵控制播放。
   請參閱 "音樂播放螢幕。"

說明	操作步驟
跳至上一個或下一個檔案	按 [◯/◯] • 如果在檔案播放後 3 秒按 [◯]，此播放將會重新開始。
向後或向前搜尋	按住 [◯/◯]
暫停或恢復播放	按 [◉]

音樂播放螢幕



No.	描述
1	播放情況
2	重複模式
3	播放圖象
4	歌曲標題，歌手，專輯標題
5	過去播放時間/ 總播放時間
6	播放進度條

重複曲目段落

您可以選擇曲目段落重複

1. 在您需要重複的部分開始點按 [•••]。
   - <A →> 顯示在螢幕頂部。
2. 在您需要重複的段落結束點按 [•••]。
   - <A ↔ B> 顯示在螢幕頂部。您的播放器將會重複標記段落。
3. 再次按 [•••]， 取消重複。

參考

您能够在開始點播放 3 秒鐘后設定結束點。

應用音效 (DNSe)

1. 在音樂播放期間，按 [☰]。
2. 選擇 <DNSe>。
3. 選擇您需要的音效。
   - 如果您選擇 <自動>, 播放器將會搜尋曲目 (ID3 標籤) 資訊及自動選擇適當音效。
   - 選擇的均衡器，選擇 <myDNSe 1> 或 <myDNSe 2>。請參閱第 43 頁 "myDNSe"。

什么是 DNSe?

Digital Natural Sound Engine (DNSe) 是由三星公司專門爲 MP3 播放器開發的一種音響效果功能。它可以爲您聆聽的音樂提供不同的音響效果。

創建播放清單

您可以通過新增需要的音樂檔案創建播放清單。這有 5 個默認播放清單。

新增音樂檔案到播放清單

1. 從音樂分類清單中，選擇需要的檔案新增至播放清單然後按 [☰]。
2. 選擇 <新增至播放清單>。
3. 選擇播放清單新增檔案。

> **參考**
>
> 按 [☰] 然後選擇 <新增至播放清單>，新增當前播放檔案到播放清單。

從播放清單中刪除音樂檔案

1. 從音樂分類清單中，選擇 <播放清單>。
2. 選擇需要刪除檔案的播放清單。
3. 選擇需要刪除的檔案然後按 [☰]。
4. 選擇 <從播放清單中刪除>。
   - 選擇 <刪除播放清單中的所有項>，刪除所有檔案。
   - 即使已在播放清單中已經刪除檔案，此檔案也不能從播放器上刪除。

重命名播放清單

1. 從音樂分類清單中，選擇 <播放清單>。
2. 選擇需要重新命名的播放清單然後按 [☰]。
3. 選擇 <重命名>。
4. 更改播放清單的名字。
   關於輸入文本，請參閱第 14 頁。

使用音樂選項

1. 在音樂播放期間，按 [☰]。
2. 設定下列選項。

選項	描述
新增至播放清單	新增當前播放音樂檔案到播放清單。
DNSe	選擇音樂適當的音效。
播放選項	- <播放模式>: 改變重複模式。 - <播放速度>: 改變播放速度。 - <跳躍間隔>: 在音樂播放期間按 [◯] 設定間隔。 參考 有些檔案可能不能在已選擇的間隔跳躍。
音樂播放螢幕	在音樂播放期間更改圖象。 參考 播放器可以支持小於 2 MB 的封面圖象。

參考

如果正在播放 Ogg Q10 格式的音樂檔案，將不能選擇音效及改變播放速度。

使用附加應用程序

學習怎樣使用播放器的附加應用程序。

圖片 31
文本 33
FM 廣播 35
DATACASTS 38
MICRO SD 39

圖片

瀏覽儲存在播放器的圖片。
請參閱第 16 頁的"下載媒體檔案" 下載檔案。

瀏覽圖片

1. 在主功能表螢幕中，選擇 。
2. 瀏覽圖片。

3. 選擇需要的圖片。此圖片全屏顯示。

4 瀏覽圖片。

說明	操作步驟
移至上一個或下一個檔案	按 [◁/▷]
放大	按 [•••] • 按 [▢] 移至放大圖片。 • 按 [↩] 退出放大模式。

參考

- 如果圖片尺寸過大，它可能需要比較長的時間顯示。
- 當正在播放音樂或暫停播放，顯示圖片螢幕時如果您按 [☰]，將會出現迷你播放器。如果正在聆聽 FM 廣播，當迷你播放器出現時，此 FM 廣播將會自動開始聆聽。。

播放幻燈片

您可以用圖片創建及播放幻燈片。

1 顯示檔案清單時，按 [☰]。
2 選擇 <開始自動播放>。
3 用幻燈片瀏覽圖片。
4 按 [↩]，停止幻燈片。

設定墻紙圖片

1 從檔案清單中，打開您想要的圖片然后按 [☰]。
2 選擇 <選取我的桌面>。
3 從彈出窗口中選擇 <是>。

文本

您能够使用文本閱讀器閱讀儲存在播放器的文本檔案 (.txt) 。
請參閱第16 頁的 "下載媒體檔案"下載檔案。

閱讀文本檔案

1. 在主功能表裏，選擇 。
2. 從清單中選擇文本檔案。
3. 瀏覽文檔。

說明	操作步驟
移至上一頁或下一頁	按 [◯/◯]
更改字體大小	按 [•••]

參考

當正在播放音樂或暫停播放，顯示圖片螢幕時如果您按 [☰]，將會出現迷你播放器。如果正在聆聽 FM 廣播，當迷你播放器出現時，此 FM 廣播將會自動開始聆聽。

插入書籤

您能够在需要的頁碼插入書籤然後轉至書籤瀏覽文檔頁碼。

1. 轉至需要書籤的頁碼然後按 [☰]。
2. 選擇 <書籤> 然後 <新增書籤>。
   - 一個書籤已插入螢幕頂部。

參考

- 您能够在每個文本檔案中插入一個書籤。
- 按 [☰] 然後選擇 <書籤> 然後 <轉至書籤> 轉至書籤。
- 按 [☰] 然後選擇 <書籤> 然後 <刪除書籤> 刪除書籤。

更改背景樣式

您可以改變文本閱讀器的背景樣式。

1. 顯示文本螢幕時，按 [☰] 。
2. 選擇 <文本閱讀器類型> 。
3. 按 [●] 更改背景樣式。

FM 廣播

您能够聆聽 FM 廣播，也可保存廣播電臺。

參考

播放器必須連接耳機聆聽 FM 廣播。耳機作爲廣播天線使用。

聆聽 FM 廣播

1. 在主功能表中，選擇 。
2. 按 [▢] 瀏覽廣播電臺。
   - 按 [▢/▢] 滾動廣播頻率。
   - 按住 [▢/▢] 自動瀏覽存在的電臺。
3. 聆聽 FM 廣播。



1	廣播模式 (手動模式/預置模式)
2	當前電臺的頻率
3	頻率條
4	靜音顯示 - 按 [●] 實行 FM 廣播靜音或解除靜音。

參考

根據當地信號情況，FM 廣播可能不能恰當調節電臺頻率。

保存廣播電臺

您能够保存喜愛的廣播電臺讓您更方便的訪問電臺。

保存當前廣播電臺

1. 在手動模式下，按 [☰]。
2. 選擇 <新增到預設>。

自動保存廣播電臺

您能够自動搜尋存在的廣播電臺然後作爲您喜愛的電臺保存。
最多能够保存 30 個廣播電臺。

1. 在手動模式下，按 [☰]。
2. 選擇 <自動預設>。
3. 從彈出窗口中選擇 <是>。
   - 開始自動調臺。廣播電臺位置已保存在您喜愛的電臺中。

聆聽喜愛的廣播電臺

1. 在手動模式，按 [☰]。
2. 選擇 <轉至預設模式>。



3. 選擇需要的廣播電臺。

使用 FM 廣播選項

您能够更改使用 FM 廣播的選項。

1. 從 FM 廣播螢幕中，按 [☰] 。
2. 設定下列各選項。

選項	描述
轉至預設模式	轉換預置模式
轉至手動模式	轉換手動模式
新增到預設*	保存當前廣播電臺。
從預設中刪除	刪除已保存的廣播電臺。
自動預設	自動搜尋然後保存存在的電臺。 (最多 30 個)。
收音區域設置	根據您的地區重新調節頻率。 參考 • 根據所在的地區不同，這些選項可能不存在。 • 如果您更改地區，則原先保存的電臺將被刪除。

* 僅可用於手動模式。
** 僅可用於預置模式。

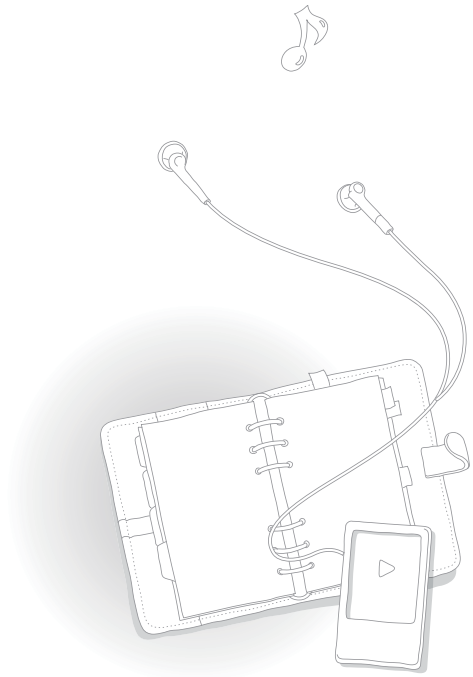

DATACASTS

當您已注册喜愛的新聞 RSS 地址的網站，在 EmoDio 上的UCC 或 blogs，您能够瀏覽不同的内容。

參考

關於 Datacasts 的更多資訊，請參閱 EmoDio 的幫助部分。

什么是 RSS?

RSS 是基於 XML 檔案出版及傳送方式，比如用户或讀者經常在網上更新新聞或 blog 資訊時常用的一種簡便方法。

1. 在主功能表中，選擇 。
2. 選擇您需要的頻道檔案夾。



3. 選擇您需要瀏覽的内容。
4. 瀏覽此内容。

MICRO SD

您必須插入記憶體卡儲存新增檔案。您能够在記憶體卡中搜尋檔案及從記憶體卡中删除檔案。

插入記憶體卡 (選項)

1 打開記憶體卡槽的蓋子然後插入記憶體卡。

- 插入記憶體卡且標籤面朝上。







2 在記憶體卡槽推進記憶體卡直到它在適當位置鎖定。

- 當記憶體卡已正確插入，將會出現在主功能表螢幕頂部。

注意

- 播放器可支援1GB至16 GB 的 microSD™ 或 microSDHC™ 記憶體卡。
  (只使用支援播放器的記憶體卡。根據不同的制造商，某些記憶體卡可能不支援播放器。)
- 請勿在錯誤方向插入記憶體卡。
- 請勿在使用時從播放器移除記憶體卡。
- 一定要備份儲存在記憶體卡的重要數據。制造商不能保證用户行爲造成的數據丢失。

移除記憶體卡

輕推記憶體卡直到它脱離播放器，可以移動記憶體卡，然後從記憶體卡槽中拔出。

在記憶體卡中管理檔案

搜尋檔案

1. 插入記憶體卡。
2. 在主功能表中，選擇 。
   - 顯示已儲存在記憶體卡的檔案夾清單。
3. 選擇需要的檔案夾。
4. 在檔案清單中向上或向下滾動。
5. 選擇需要的檔案。

參考

您不能打開不支援播放器的檔案。

刪除檔案

1. 從插入記憶體卡中擇需要的檔案夾。
2. 選擇需要刪除的檔案然後按 [☰]。
3. 選擇 <刪除>。
4. 從彈出窗口中選擇 <是>。

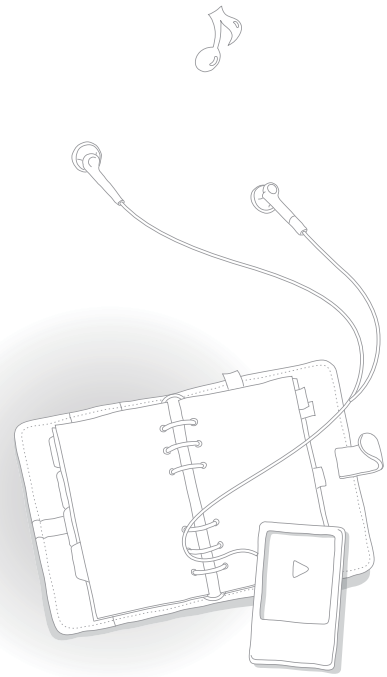

自定義設定

更改您的播放器設定與參數一致。

設定 42
聲音設定 43
顯示幕設定 43
語言設定 43
日期和時間設定 44
系統設定 44

設定

學習更改播放器的設定。

1. 在主功能表上，選擇 。
2. 選擇您需要定制的設定功能表。

功能表	描述
聲音	設定聲音設定
顯示幕	設定顯示設定
語言 (Language)	設定語言設定
日期和時間	設定當前時間及日期
系統	設定系統設定

3. 選擇選項。
4. 更改設定。

聲音設定

功能表	描述
街頭模式	通過過濾外面噪音設定比較清晰的音樂聲音。
提高音質	設定優質的低分辨率音頻檔案提高聲音質量。
我的 DNSe	設定您自己的均衡器 (DNSe) 定制喜歡的聲音。
蜂鳴聲	當您按鍵時，打開或關閉蜂鳴聲。
最佳音量	爲了保護您的聽力，請設定耳機的限制音量。 - <Off>: 您能够調節需要的音量。如果您調節音量超過 15 等級然後重新啓動播放器，爲了保護您的聽力，播放器音量將會在 15 等級開機。 - <On>: 當您長時間處於高音量等級將會顯示警告資訊。播放器將會自動降低到適合的等級。
主 EQ	優化耳機的聲音設定。 調整均衡器的頻率。

顯示幕設定

功能表	描述
功能表設計	改變主功能表螢幕樣式。
主題顏色	在清單中選擇突出選項的主題效果。
字型	選擇顯示文本字體類型。
螢幕關閉時間	設定沒有使用播放器時的待機時間。
亮度	調節螢幕亮度。
重設我的桌面	重置墻紙圖象。

語言設定

功能表	描述
功能表語言	選擇顯示文本的語言。
內容語言	選擇播放器儲存內容顯示的語言。

日期和時間設定

設定當前時間及日期。

滾動一個單位然後按 [▢] 更改時間或日期。按 [◉]，保存日期及時間。

系統設定

功能表	描述
我的信息	輸入個人資訊，例如您的名字及生日。 參考 當開機時，螢幕將會顯示輸入的用户名字。 您生日時，將會顯示 "Happy birthday" 資訊。
休眠	設定預設的時間後將自動關機。
資料庫 [DB]更新	更新媒體庫。當播放器的檔案名不正確顯示，請在更改語言爲顯示內容後使用此選項 (選擇<Settings> → <語言 (Language)> → <內容語言>) 。
內定值	將所有設定恢複爲出廠設定。
格式化	刪除所有儲存在播放器的資料及檔案。 參考 確保備份拷貝儲存在播放器的所有重要資料。廠商概不負責用户自行遺失的資料。

功能表	描述
DivX 注册代碼	查看播放器的 DivX 注册代碼。 參考 ABOUT DIVX VIDEO: DivX® 是一個由 DivX, Inc 創建的數字視訊格式。這是一個播放 DivX 視訊的 official DivX 認證設備。關於更多資訊及轉換檔案爲 DivX 視訊的軟件工具，請訪問 www.divx.com 。 ABOUT DIVX VIDEO-ON-DEMAND: 爲了播放 DivX Video-on-Demand (VOD) 內容， DivX Certified® 設備必須注册。在裝置設定功能表中位於 DivX VOD 部分，產生注册代碼。使用此代碼進入 vod.divx.com 完成注册過程及學習更多關於 DivX VOD 的資訊。 在移動剖面中，已認證的設備可以播放 DivX 視訊: “已認證的 DivX 能够播放 DivX® 視訊高達 320x240”

功能表	描述
關於	檢查播放器的系統資訊。 - <Firmware>: 瀏覽安裝在播放器的韌件版本。 - <Memory>: 瀏覽總記憶體容量，已用記憶體容量及剩余記憶體容量。 參考 關於內置記憶體 1 GB = 1,000,000,000 字節 : 由於內部韌件會占用部分記憶體，所以實際可用記憶體小於標示的記憶體

附錄

查看播放器的維護，產品規格及疑難解答。

播放器的維護 47
疑難解答 48
產品規格 50
許可證 52

播放器的維護

認真閱讀下列關於播放器清潔，儲存或放置的方法。

清潔

- 當播放器弄髒時，用干燥布料輕輕擦干净。
- 切勿清洗播放器的表面。否則可能導致損壞或影響播放器的性能。
- 切勿用汽油，苯，稀釋劑，WD-40 或其他化學物質清洗播放器。否則會損壞播放器表面。

儲存

將播放器儲存在通風的地方。

放置

- 包裝材料，電池，及電子設備分開放置。
- 包裝材料包括紙及兩種類型的外殼 (PC, PE)。

疑難解答

如果您在使用播放器中出現一些故障，請先參閱以下方法。如果出現不能解決的故障，請聯系服務中心。

問題	解答方法
不能開機。	• 電量不足時，將不能開機。請重新充電後再開機。 • 按重新設定孔重設播放器。
按鍵不動作。	• 請檢查按鍵是否被鎖定。 • 請檢查是否按了正確的按鍵。 • 按重新設定孔重設播放器。
螢幕不顯示。	• 在陽光照射下，螢幕亮度可能不明顯。 • 如果在 <螢幕關閉時間> 設定的時間過後，螢幕將自動關閉
播放器自動關機。	如果您在暫停播放後 5 分內沒有使用播放器，將會自動關機。
電池使用時間與用户手册所述不符。	• 根據當前的聲音模式或顯示設定不同，電池的使用時間可能不同。 • 當產品處於過高或過低的温度環境中，有可能縮短電池的使用壽命。
EmoDio 不能工作。	請檢查電腦是否滿足配置要求。 請參閱 "被推薦的電腦配置。"
播放器不能連接電腦。	運行 Windows 更新電腦系統。選擇您想要升級的服務包然後升級。升級完成後，重啓電腦然後再與播放器連接。
檔案傳送速度太慢。	在 <Settings> → <系統> → <格式化> 格式化您的播放器然後重試。 結束沒有使用的所有程序。如果同時運行多個程序，檔案傳送速度可能會變慢。

問題	解答方法
播放器不能播放任何檔案。	• 請檢查保存在播放器的音樂檔案是否與播放器相兼容。 • 請檢查播放的檔案大小。播放器不能播放超過 2 GB 的檔案。 • 請檢查音樂檔案是否已被損壞。 • 請檢查電池電量是否充足
不能下載檔案到播放器。	• 請檢查 USB 連接線是否正確連接。請斷開連接後再重新連接。 • 請檢查是否有足够的記憶體。 • 按重新設定孔重設播放器。

問題	解答方法
檔案或數據丟失。	請檢查檔案或資料正在傳送中， USB 是否斷開連接。這可能造成數據丟失或播放器發生錯誤。三星公司對於因這樣的原因造成的數據或檔案丟失概不負責
在播放過程中顯示异常的播放時間。	請檢查當前播放的檔案是否爲 VBR (Variable Bit Rate 格式)。
顯示异常的檔案名。	在 <Settings> → <語言 (Language)> → <內容語言> 更改語言然後更新媒體庫。
播放器發熱。	正在充電時的播放器會產生熱量。這不會影響播放器的壽命及性能。
播放器不能播放視訊檔案但出現錯誤資訊。	用 EmoDio 重新傳送視訊。

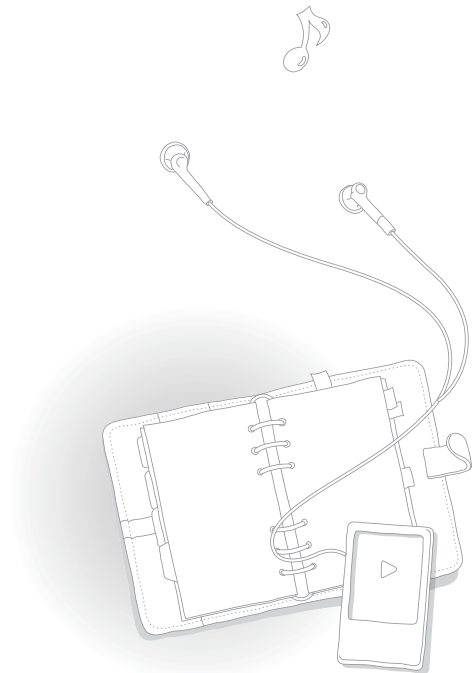

產品規格

<table>
<tr><td>產品名稱</td><td colspan="4">YP-R0</td></tr>
<tr><td>額定電壓</td><td colspan="4">DC 5.0V / 1A</td></tr>
<tr><td rowspan="11">檔案</td><td>音訊</td><td colspan="3">• MPEG1/2/2.5 Layer 3 (8 kbps ~ 320 kbps, 8 kHz ~ 48 kHz)
• WMA (12 kbps ~ 320 kbps, 16 kHz ~ 48 kHz)
• Ogg (32 kbps ~ 400 kbps, Q0 ~ Q10, 8 kHz ~ 48 kHz)
• AAC-LC (8 kbps ~ 320 kbps, 8 kHz ~ 48 kHz)
• AAC+ (8 kbps ~ 320 kbps, 8 kHz ~ 48 kHz)
• Enhanced-AAC-Plus (8 kbps ~ 320 kbps, 8 kHz ~ 48 kHz)
• FLAC (level 0 ~ 8, 16 kHz ~ 48 kHz)
• RA (20kbps ~ 96 kbps, 8 kHz,11.025 kHz,44.1 kHz)
• WAV (wav standard, 8 kHz ~ 48 kHz)</td></tr>
<tr><td rowspan="10">視訊</td><td></td><td>視訊</td><td>音訊</td></tr>
<tr><td>AVI/SVI</td><td>• MPEG4 (Max.720 X 480) Advanced Simple Profile@Level 5
• Divx3/4/5/(Max. 720 X 480)
• Xvid (Max. 720 X 480)
• H.264/AVC (Max. 720 X 480) High Profile@Level3.0</td><td>MP3/AAC/AAC+</td></tr>
<tr><td></td><td>WMV9 (MAX. 720 X 480) Advanced Profile@level1</td><td>WMA</td></tr>
<tr><td>MP4</td><td>• MPEG4 (Max.720 X 480) Advanced Simple Profile@Level 5
• H.264/AVC (Max. 720 X 480) High Profile@Level 3.0</td><td>MP3/AAC/AAC+</td></tr>
<tr><td>WMV/ASF</td><td>WMV9 (MAX 720 X 480) Advanced Profile@level1(vc1)</td><td>WMA</td></tr>
<tr><td>RMVB</td><td>RV8,9,10(MAX 640x480)</td><td>RA</td></tr>
<tr><td>MOV</td><td>• MPEG4 (Max.720 X 480) Advanced Simple Profile@Level 5
• H.264/AVC (Max. 720 X 480) High Profile@Level 3.0</td><td>AAC/AAC+</td></tr>
<tr><td colspan="3"></td></tr>
<tr><td colspan="3"></td></tr>
<tr><td colspan="3"></td></tr>
<tr><td>Image</td><td colspan="3">JPEG (Baseline, Progressive), BMP (MAX32Bit), PNG, Gif (89a/87a)</td></tr>
</table>

耳機輸出		20 mW/Ch. (基於 16 Ω)
輸出頻率範圍		20 Hz ~ 20 kHz
信噪比		90 dB with 20 kHz LPF (基於 1 kHz, 0 dB)
支持檔案/檔案夾數目		檔案: 最大. 5000 檔案夾: 最大. 5000 (包括檔案)
播放時間		音樂: 30 小時 (MP3 128 kbps, 音量等級 15, 正常聲音模式, LCD 關閉) 視訊: 6 小時 ((亮度 3, 音量等級 15, 正常聲音模式)
操作温度		-5˚C ~ 35˚C (23˚F ~ 95˚F)
外殼		鋁, 亞克力(丙烯酸), 塑膠
重量		60 g
尺寸 (寬x高x深)		52 X 93 X 8.8 mm
FM 廣播	FM 失真度	1 %
	FM 信噪比	50 dB
	FM 實用靈敏度	38 dBμ

* 爲提高產品性能進行的產品升級等，本用户手册的内容可能會有修正，恕不另行通知。

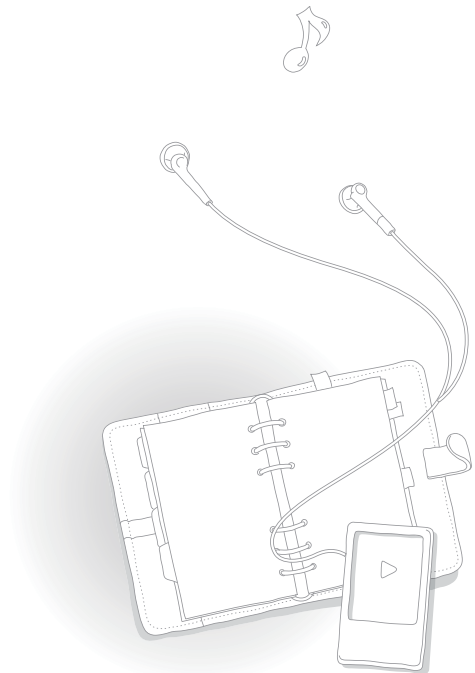

許可證

本產品使用用户手册所述之產品已獲得第三方知識財產權許可。該許可權提供最終使用消費者按照許可的内容用於私人非商務用途。不得用於商務用途。該許可不適用除本產品外的其他任何產品。不允許不符合ISO/IEC 11172-3 或 ISO/IEC 13818-3要求加工的產品且與本產品一起使用或銷售。該許可權僅用於消費者使用本產品進行符合 ISO/IEC 11172-3 或 ISO/IEC 13818-3.的音頻檔案的解碼和編碼。產品的特性功能不符 ISO/IEC 11172-3 或 ISO/IEC 13818-3.要求的不能授權許可使用。

本產品符合低功率電波輻射性電機管理辦法第十二條，第十四條等條文規定。

1．經型式認證合格之低功率射頻電機，非經許可，公司，商號或使用者均不得擅自變更頻率，加大功率或變更原設計之特性及功能。

2．低功能射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，并改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業，科學及醫療用電波輻射性電機裝置之干擾。

開源公告

某些產品軟件成分組成的資源代碼隱藏在 GNU General Public License(GPL) 及 BSD 下面。
要獲得以下的資源代碼，請登陸 http://opensource.samsungmobile.com/。

Component	License
Linux Kernel 2.6.24	GPL 2.0
MSC application	GPL 2.0
Video for Linux Two header file	BSD 2.0
Busybox v1.6.1	GPL 2.0

以下是 GNU GPL 及 BSD 的最初英文文本。

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991
Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it. For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps:
(1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software. Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software.

If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents.
We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0) This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The “Program”, below, refers to any such program or work, and a “work based on the Program” means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term “modification”.) Each licensee is addressed as “you”.

   Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1) You may copy and distribute verbatim copies of the Program’s source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2) You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

   a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

   b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

   c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

   These requirements apply to the modified work as a whole.
   If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.
   Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work

under the scope of this License.

3) You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
   a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
   b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
   c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

   The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

   If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4) You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
5) You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
6) Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7) If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License.

   If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

> <one line to give the program's name and a brief idea of what it does.>
> Copyright (C) <year> <name of author>
>
> This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or(at your option) any later version.
>
> This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
> See the GNU General Public License for more details.
>
> You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

> Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type ‘show w’.
> This is free software, and you are welcome to redistribute it under certain conditions; type ‘show c’ for details.

The hypothetical commands ‘show w’ and ‘show c’ should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ‘show w’ and ‘show c’; they could even be mouse-clicks or menu items--whatever suits your program.
You should also get your employer (if you work as a programmer) or your school, if any, to sign a “copyright disclaimer” for the program, if necessary. Here is a sample; alter the names:

> Yoyodyne, Inc., hereby disclaims all copyright interest in the program ‘Gnomovision’ (which makes passes at compilers) written by James Hacker.
>
> <signature of Ty Coon>, 1 April 1989
> Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

File-backed USB Storage Gadget, for USB development

Copyright (C) 2003-2007 Alan Stern
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:
1. Redistributions of source code must retain the above copyright notice, this list of conditions, and the following disclaimer, without modification.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The names of the above-listed copyright holders may not be used to endorse or promote products derived from this software without specific prior written permission.

ALTERNATIVELY, this software may be distributed under the terms of the GNU General Public License ("GPL") as published by the Free Software Foundation, either version 2 of that License or (at your option) any later version.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT
LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Video for Linux Two header file

Copyright (C) 1999-2007 the contributors

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The names of its contributors may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

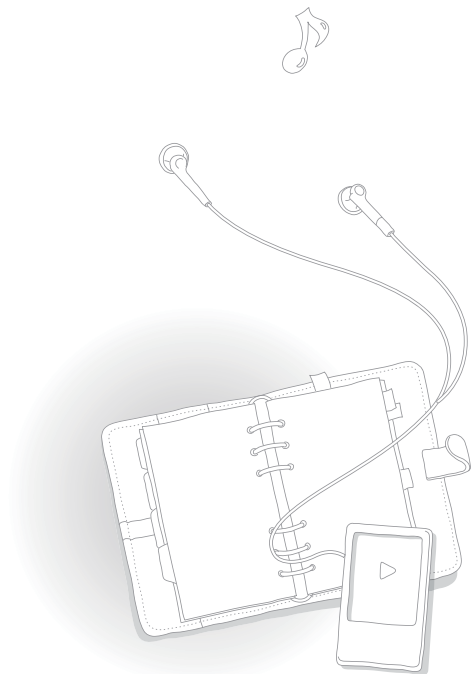

如有關於三星產品的任何疑問或評論，請聯絡三星客户關懷中心
台北市內湖區行愛路77巷63號6F
6F, No.63, Lane 77, Xing Ai Rd., Nei Hu Dist, Taipei, Taiwan, R.O.C
台灣三星電子股份有限公司
0886-2-6602-6089
www.samsung.com/tw

REV. 0.0